


**Pinces tirées - Zugspannzangen - Pull-type collets**

Fig. 1

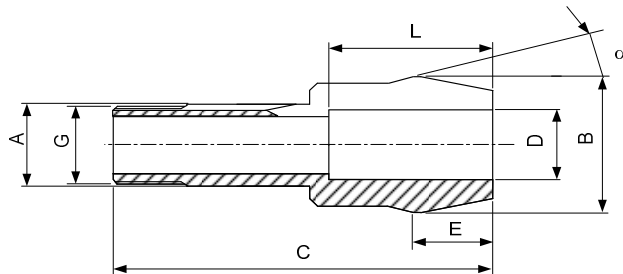

Alésage à cran  
 Stufenbohrung  
 Step bore





Fig. 2

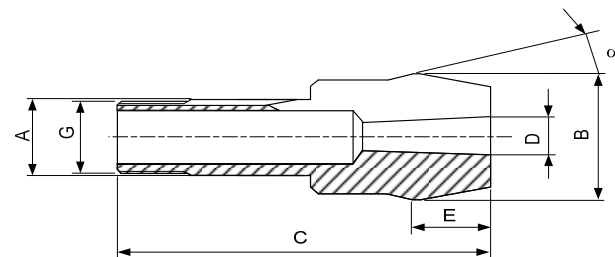

| Type    | Art.                   | A  | B  | C     | E    | G                                                     | $\alpha$ | D min-max                     | L       | Fig. |
|---------|------------------------|----|----|-------|------|-------------------------------------------------------|----------|-------------------------------|---------|------|
| B32/B45 | <b>72-2005</b>         | 32 | 53 | 148.5 | 32.5 | $\emptyset 29.7 \times 1.693 \nabla 45^\circ/5^\circ$ | 15°      | 1.00...24.00<br>24.01...40.00 | -<br>80 | 1    |
|         | <b>72-93409</b><br>26) | 32 | 53 | 148.5 | 32.5 | $\emptyset 29.7 \times 1.693 \nabla 45^\circ/5^\circ$ | 15°      | Morse DIN228<br>MK-1          | -       | 2    |
|         | <b>72-93410</b><br>26) | 32 | 53 | 148.5 | 32.5 | $\emptyset 29.7 \times 1.693 \nabla 45^\circ/5^\circ$ | 15°      | Morse DIN228<br>MK-2          | -       | 2    |
|         | <b>72-93411</b><br>26) | 32 | 53 | 148.5 | 32.5 | $\emptyset 29.7 \times 1.693 \nabla 45^\circ/5^\circ$ | 15°      | Morse DIN228<br>MK-3          | -       | 2    |
|         | <b>72-93412</b><br>26) | 32 | 53 | 173   | 57   | $\emptyset 29.7 \times 1.693 \nabla 45^\circ/5^\circ$ | 15°      | Morse DIN228<br>MK-4          | 107     | 2    |

Alésages standards (rond, carré, six-pans) selon liste de prix. Autres alésages sur demande.  
 Standardbohrungen (rund, vierkant, sechskant) gemäss Preisliste. Andere Bohrungen auf Anfrage.  
 Standard bores (round, square, hexagonal) according to price list. Other bores on request.

26) Sur demande - Auf Anfrage - On request