
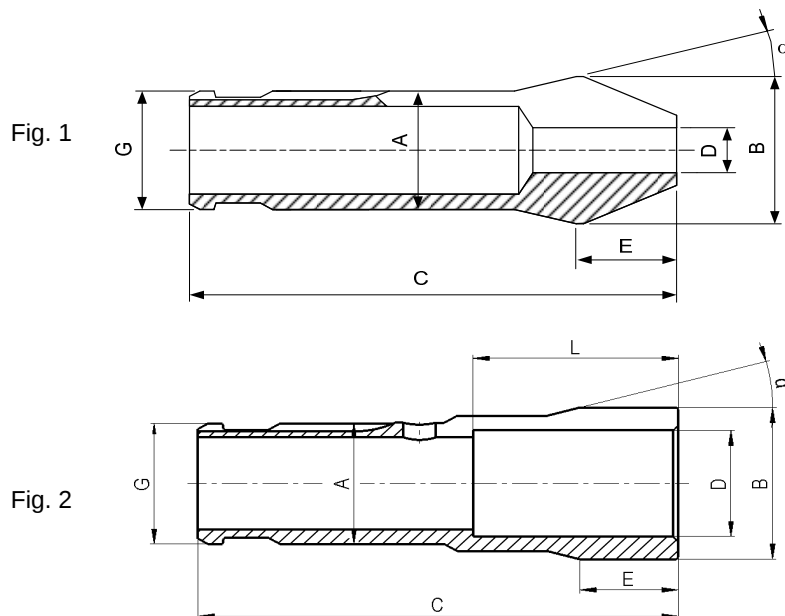


Pincas tirées - Zugspannzangen - Pull-type collets
Pince de serrage - Spannzange - Clamping collet


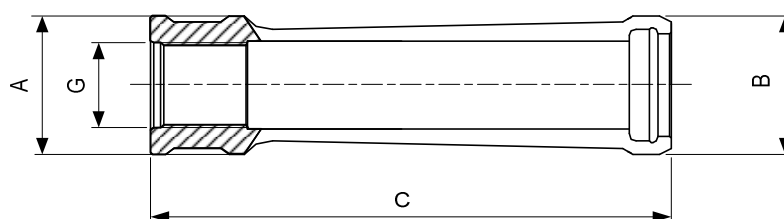
Alésage à cran
 Stufenbohrung
 Step bore



Type	Art.	A	B	C	E	G	α	D min-max	L	Fig.
BCR32	72-93235	32	40	117	24	32	15°	0.30...24.00 24.01...28.00	- 64	1
	72-93416 26)	32	40	117	24	32	15°	Morse DIN228 MK-1	-	1
	72-93417 26)	32	40	117	24	32	15°	Morse DIN228 MK-2	-	1
	72-93418 26)	32	40	117	24	32	15°	Morse DIN228 MK-3	-	1
	72-93670	32	40	117	24	32	15°	28.01...32.00	50	2

Alésages standards (rond, carré, six-pans) selon liste de prix. Autres alésages sur demande.
 Standardbohrungen (rund, vierkant, sechskant) gemäss Preisliste. Andere Bohrungen auf Anfrage.
 Standard bores (round, square, hexagonal) according to price list. Other bores on request.

26) Sur demande - Auf Anfrage - On request

**Pince de traction pour BCR
 Zugspannzange für BCR
 Pull-type collet for BCR**


Type	Art.	A	B	C	G
D40	74-60039	40	40	133	M24x1.5