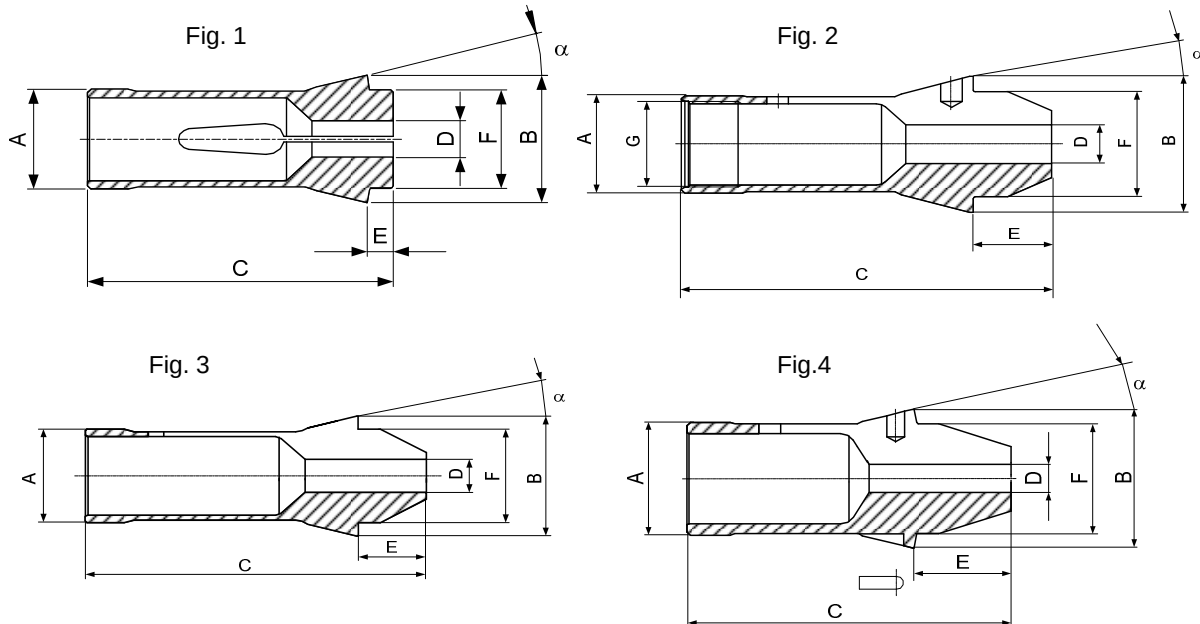


SCHAUBLIN
F

Page - Seite

17.4
Pinces poussées - Druckspannzangen - Dead length collets


Type	Art.	A	B	C	E	F	G	α	D min-max	Fig.
F22	76-71	22	30	55	6	21	-	15°	0.5-17.0 1.0-12.0 1.0-14.5	1
F23.8	76-2034	23.8	28.3	62	7	22	-	15°15'	0.5-19.05 1.0-12.0 1.0-16.5	1
F25	76-64	25	35	77	10	27	-	16°	0.5-21.0 1.0-15.0 1.0-18.0	1
	76-2018 10) 76-64	25	35	85	18	27	M22x1	16°	0.5-20.0 1.0-14.0 1.0-17.0 lisse-glatt-smooth	2
F26	76-90 26)	26	32	67	7	27.5	-	13°		1
F27	76-22	27	38	72.7	8	30	-	15°	0.5-23.0 1.0-16.0 1.0-20.0	1
	76-2040 10) 76-22	27	38	83	18.3	30	-	15°	0.5-23.0 1.0-15.5 1.0-19.05 lisse-glatt-smooth	4
F28	76-93	28	38	70	7	28	-	15°	0.5-23.0 1.0-16.0 1.0-20.0	1
F30	76-63	30	42	80	10	34	-	16°	0.5-26.0 1.0-18.0 1.0-22.22	1
	76-101	30	38	65	6	32	-	15°	0.5-26.0 1.0-18.0 1.0-22.5	1
	76-2019 10) 76-101	30	38	79	20	32	-	15°	0.5-25.4 1.0-18.0 1.0-22.0 lisse-glatt-smooth	3
F32	76-221	32	45	75	8	34	-	15°	1.0-27.0 2.0-19.0 2.0-23.0	1

Alésages standards (rond, carré, six-pans) selon liste de prix. Autres alésages sur demande.
 Standardbohrungen (rund, vierkant, sechskant) gemäss Preisliste. Andere Bohrungen auf Anfrage.
 Standard bores (round, square, hexagonal) according to price list. Other bores on request.

10) Article de base - Basisartikel - Basic item

26) Sur demande - Auf Anfrage - On request