

SCHAUBLIN
W

Page - Seite

22.1
Pincés tirées - Zugspannzangen - Pull-type collets

Fig. 1



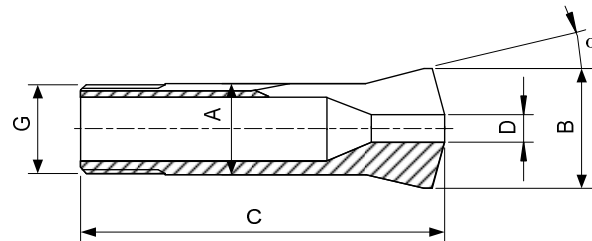


Fig. 2

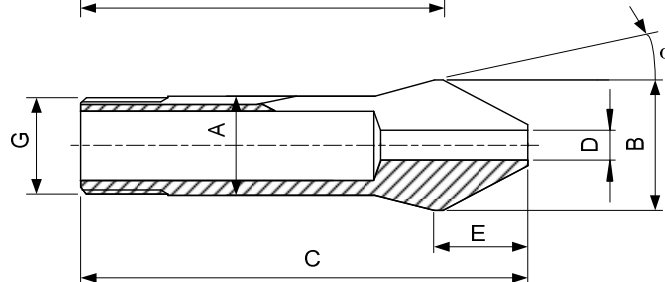

Alésage à cran
 Stufenbohrung
 Step bore



Obturbateurs pour pincés, voir page 70
 Dichtgummi für Spannanzgen auf Seite 70
 Rubber seals for collets on page 70

Type	Art.	A	B	C	E	G	α	D min-max	L	Fig.	
W10	80-1	10	14	43.6	-	∅ 9.83x0.833	↘ 45°/5°	15°	0.30...6.70 6.71...8.00 8.01...8.50 8.51...9.00 9.01...9.50 9.51...10.00	- 15 6 5 4 3	1
	80-2009	10	14	49.5	8	∅ 9.83x0.833	↘ 45°/5°	15°	0.30...6.35 6.36...8.00	- 21	2
W12	80-2	12	16	46	-	∅ 11.75x1.25	↘ 45°/5°	15°	0.30...8.00 8.01...10.00 10.01...10.50 10.51...11.00 11.01...11.50 11.51...12.00 12.01...12.50	- 17 6 5 4 3 2	1
	80-93108 10) 80-2	12	16	52	8.8	∅ 11.75x1.25	↘ 45°/5°	15°	0.30...8.00 8.01...10.00	- 24	2
W15	80-3	15	20.2	58.3	-	∅ 14.75x1.25	↘ 45°/5°	15°	0.30...10.70 10.71...12.70 12.71...13.00 13.01...13.50 13.51...14.00 14.01...14.50 14.51...15.00 15.01...15.50 15.51...16.00	- 22 9.5 8.5 7.5 6.5 5.5 4.5 3.5	1
	80-93285 10) 80-3	15	20.2	67	12	∅ 14.75x1.25	↘ 45°/5°	15°	0.30...10.20 10.21...12.70	- 32	2

Alésages standards (rond, carré, six-pans) selon liste de prix. Autres alésages sur demande.
 Standardbohrungen (rund, vierkant, sechskant) gemäss Preisliste. Andere Bohrungen auf Anfrage.
 Standard bores (round, square, hexagonal) according to price list. Other bores on request.

10) Article de base - Basisartikel - Basic item