

SCHAUBLIN
W

Page - Seite

22.1
Pincés tirées - Zugspannzangen - Pull-type collets

Fig. 1

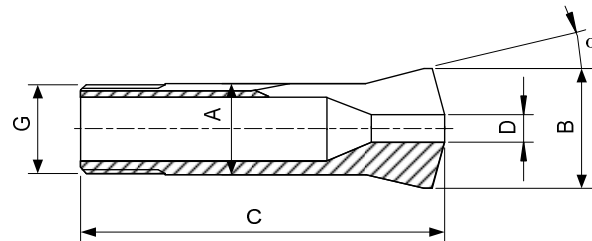
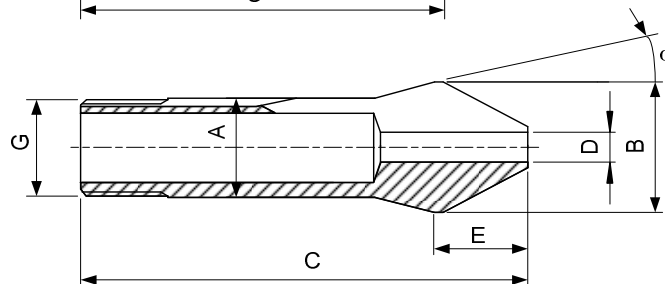



Fig. 2


 Alésage à cran
 Stufenbohrung
 Step bore


Obturbateurs pour pincés, voir page 70
 Dichtgummi für Spannzangen auf Seite 70
 Rubber seals for collets on page 70

Type	Art.	A	B	C	E	G	α	D min-max		L	Fig.
W10	80-1	10	14	43.6	-	$\emptyset 9.83 \times 0.833$	$\nabla 45^\circ/5^\circ$	15°	0.30...6.70 6.71...8.00 8.01...8.50 8.51...9.00 9.01...9.50 9.51...10.00	- 15 6 5 4 3	1
	80-2009	10	14	49.5	8	$\emptyset 9.83 \times 0.833$	$\nabla 45^\circ/5^\circ$	15°	0.30...6.35 6.36...8.00	- 21	2
W12	80-2	12	16	46	-	$\emptyset 11.75 \times 1.25$	$\nabla 45^\circ/5^\circ$	15°	0.30...8.00 8.01...10.00 10.01...10.50 10.51...11.00 11.01...11.50 11.51...12.00 12.01...12.50	- 17 6 5 4 3 2	1
	80-93108 10) 80-2	12	16	52	8.8	$\emptyset 11.75 \times 1.25$	$\nabla 45^\circ/5^\circ$	15°	0.30...8.00 8.01...10.00	- 24	2
W15	80-3	15	20.2	58.3	-	$\emptyset 14.75 \times 1.25$	$\nabla 45^\circ/5^\circ$	15°	0.30...10.70 10.71...12.70 12.71...13.00 13.01...13.50 13.51...14.00 14.01...14.50 14.51...15.00 15.01...15.50 15.51...16.00	- 22 9.5 8.5 7.5 6.5 5.5 4.5 3.5	1
	80-93285 10) 80-3	15	20.2	67	12	$\emptyset 14.75 \times 1.25$	$\nabla 45^\circ/5^\circ$	15°	0.30...10.20 10.21...12.70	- 32	2

Alésages standards (rond, carré, six-pans) selon liste de prix. Autres alésages sur demande.
 Standardbohrungen (rund, vierkant, sechskant) gemäss Preisliste. Andere Bohrungen auf Anfrage.
 Standard bores (round, square, hexagonal) according to price list. Other bores on request.

10) Article de base - Basisartikel - Basic item